

VECTRIX ADVANCE TECHNOLOGY



VECTRIX EMERGENCY CHARGING

Smart. Sustainable. Anytime.
Anywhere.



Singapore
hello@vectrix-ev.com
+65-883-77097
www.vectrixglobal.com

Battery Pack

Parameter	Value	Notes
Weight	300KG	
Voltage	51.2V	
Capacity	630Ah	
Continuous Discharge	650Ah	
Charging Current	150A	
Communication	Via CAN/RS485	
Protection	OverCurrent, OverTemperature/OverVoltage	OverTemperature/Short-Circuit
Discharge Temperature Range	-10°C ~ +60°C	
Charging Temperature Range	0°C ~ +50°C	
Inverter		
Output Voltage	AC230V/50Hz	Single-phase
Maximum Charging Power	6 kW	
Maximum Output Power	6.2 kW	
Output Port	Industrial	32A 3-pin socket
Weight - Battery & Inverter	300KG	


Keep Your
Power At Its
Peak



Charge
Smarter,
Drive Farther



Drive with
peace of mind

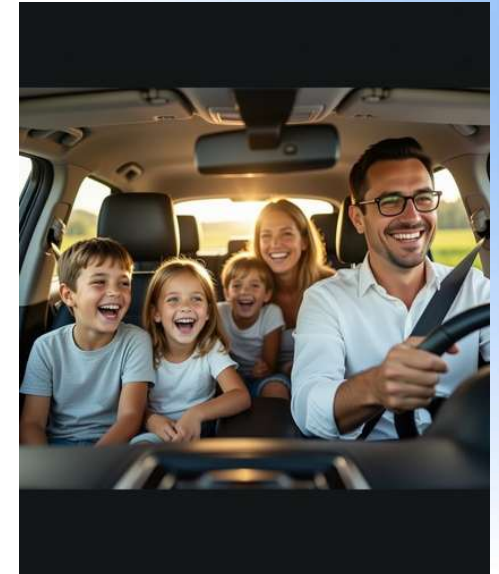

- 1 No more range anxiety
- 2 Charge anywhere, anytime
- 3 Fast charge to 20% within 15 mins

AVOID EXPENSIVE TOW FEES !